

Hoyalux iD LifeStyle 4i & 4

PROGRESIV FREEFORM	16 mm	15 mm	14 mm	13 mm	12 mm	11 mm
--------------------	-------	-------	-------	-------	-------	-------



- Progresivna sočiva premijum kategorije optimizovana tehnologijom binokularne harmonizacije, dodatno konfirmisano kroz dodatno konfirmisano kroz binokularni model i uz parametar nošenja
- Mogućnost izbora 3 dizajna omogućava savršeno prilagođavanje klijentovog životnog stila
- Optimizacija dizajna sočiva po individualnim vrednostima okvira/klijenta
- Unapređena i šira srednja i zona za blizinu.
- Individualni dizajn - uzimaju se u obzir individualni parametri: pupilarna distanca, verteks distanca, udaljenost do zone čitanja, pantoskopski ugao, zakrivljenost okvira (Ovo se odnos na LifeStyle 4i)

CENTRIRANJE:

Dužina progresivnog kanala:	Od centra zenice do gornje ivice okvira:	Od centra zenice do donje ivice okvira:
16 mm	10 mm	20 mm
15 mm		19 mm
14 mm		18 mm
13 mm		17 mm
12 mm		15 mm
11 mm		14 mm

Savet:

Koristite visuReal sistem videocentriranja za preciznu ugradnju sočiva.



Garancija



G4: 3 godine garancije na Hi-Vision LongLife UV control, BlueControl, antibakterijal i Meiryu slojeve
G2: garancija na privikavanje

Opcije sunčanih sočiva

SENSITY 2	•Najnaprednije fotoosetljivo rešenje •Izuzetno prozirno unutra •Do 2 puta brže vreme reakcije na promenu svetla
SENSITY DARK	•Izuzetno prozirno unutra •Maksimalno tamno napolju •Tamni iza soferšajbne
SENSITY SHINE	Dostupne kombinacije: Sensity dark braon + Copper light mirror, Sensity dark sivo + silver light mirror Sensity dark zeleno + blue light mirror
SENSITY FAST	•Najbrže prilagodljivo fotoosetljivo sočivo na tržištu •Blede do pola zatamnjenosti u samo par sekundi •Potpuno prozirno unutra
HI-VISION Sun pro	•Eliminiše neželjenu refleksiju •UV zaštita 100% Preporučeno da se koristi samo u slučaju bojenih sočiva
NOVA MIRROR	•Eliminiše neželjenu refleksiju •UV zaštita 100% Preporučeno da se koristi samo u slučaju bojenih sočiva

INSTRUKCIJE ZA MONTAŽU

- Horizontalno - Izmerite pupilarnu distancu za desno i levo oko, koristeći sredinu okvira kao referentnu tačku.
- Vertikalno - tačka ugradnje postavljena je u sredini zenice, kada je telo u prirodnom položaju, a pogled na daljinu, poštujući razliku između desnog i levog oka.

Proizvodni opsezi

Eyvia 1.74	Eynoa 1.67	Eyas 2.0 1.60	PNX 1.53	1.50
Ø80: +6.00 □ -10.00 cyl.≤4.00 Ø80: +4.00 □ -8.00 cyl.≤6.00 Ø75: +8.00 □ -12.50 cyl.≤6.00 Ø70: +8.00 □ -13.00 cyl.≤6.00 Adicija 0.75 - 3.50 Prizma do 5 cm/m	Ø80: +6.00 □ -9.50 cyl.≤4.00 Ø80: +3.00 □ -8.00 cyl.≤6.00 Ø75: +8.00 □ -11.50 cyl.≤6.00 Ø70: +8.00 □ -12.00 cyl.≤6.00 Adicija 0.75 - 3.50 Prizma do 5 cm/m	Ø80: +6.00 □ -8.00 cyl.≤4.00 Ø80: +3.00 □ -6.00 cyl.≤6.00 Ø75: +8.00 □ -10.00 cyl.≤4.00 Ø75: +8.00 □ -8.00 cyl.≤6.00 Ø70: +8.00 □ -10.00 cyl.≤4.00 Ø70: +8.00 □ -8.00 cyl.≤6.00 Ø65: +8.00 □ -10.00 cyl.≤6.00 Adicija 0.75 - 3.50 Prizma do 5 cm/m	Ø80: +3.00 □ -6.00 cyl.≤4.00 Ø75: +6.00 □ -8.00 cyl.≤4.00 Ø70: +6.00 □ -8.00 cyl.≤6.00 Adicija: 0.75 - 3.50 Prizma do 3 cm/m	Ø80: +3.00 □ -6.00 cyl.≤4.00 Ø75: +6.00 □ -8.00 cyl.≤4.00 Ø70: +6.00 □ -8.00 cyl.≤6.00 Adicija 0.75 - 3.50 Prizma do 3 cm/m

Hoyalux iD LifeStyle 4i & 4



PROGRESIV FREEFORM

iD LIFESTYLE
4i

Gravure	Materijal - indeks					
	1.50 UV400	1.50	1.53	1.60	1.67	1.74
Hoyalux LifeStyle 4i Urban 11 mm	LSI11LU	LSI11U	LSI1XU	LSI13U	LSI15U	LSI17U
Hoyalux LifeStyle 4i Urban 12 mm	LSI21LU	LSI21U	LSI2XU	LSI23U	LSI25U	LSI27U
Hoyalux LifeStyle 4i Urban 13 mm	LSI31LU	LSI31U	LSI3XU	LSI33U	LSI35U	LSI37U
Hoyalux LifeStyle 4i Urban 14 mm	LSI41LU	LSI41U	LSI4XU	LSI43U	LSI45U	LSI47U
Hoyalux LifeStyle 4i Urban 15 mm	LSI51LU	LSI51U	LSI5XU	LSI53U	LSI55U	LSI57U
Hoyalux LifeStyle 4i Urban 16 mm	LSI61LU	LSI61U	LSI6XU	LSI63U	LSI65U	LSI67U
Hoyalux LifeStyle 4i Outdoor 11 mm	LSI11LO	LSI11O	LSI1XO	LSI13O	LSI15O	LSI17O
Hoyalux LifeStyle 4i Outdoor 12 mm	LSI21LO	LSI21O	LSI2XO	LSI23O	LSI25O	LSI27O
Hoyalux LifeStyle 4i Outdoor 13 mm	LSI31LO	LSI31O	LSI3XO	LSI33O	LSI35O	LSI37O
Hoyalux LifeStyle 4i Outdoor 14 mm	LSI41LO	LSI41O	LSI4XO	LSI43O	LSI45O	LSI47O
Hoyalux LifeStyle 4i Outdoor 15 mm	LSI51LO	LSI51O	LSI5XO	LSI53O	LSI55O	LSI57O
Hoyalux LifeStyle 4i Outdoor 16 mm	LSI61LO	LSI61O	LSI6XO	LSI63O	LSI65O	LSI67O
Hoyalux LifeStyle 4i Indoor 11 mm	LSI11LI	LSI11I	LSI1XI	LSI13I	LSI15I	LSI17I
Hoyalux LifeStyle 4i Indoor 12 mm	LSI21LI	LSI21I	LSI2XI	LSI23I	LSI25I	LSI27I
Hoyalux LifeStyle 4i Indoor 13 mm	LSI31LI	LSI31I	LSI3XI	LSI33I	LSI35I	LSI37I
Hoyalux LifeStyle 4i Indoor 14 mm	LSI41LI	LSI41I	LSI4XI	LSI43I	LSI45I	LSI47I
Hoyalux LifeStyle 4i Indoor 15 mm	LSI51LI	LSI51I	LSI5XI	LSI53I	LSI55I	LSI57I
Hoyalux LifeStyle 4i Indoor 16 mm	LSI61LI	LSI61I	LSI6XI	LSI63I	LSI65I	LSI47I

Minimalna visina ugradnje				
Dužina progresivnog kanala	N	+7mm ili +8mm	Od zenice do donje ivice okvira	Od zenice do gornje ivice okvira
11mm	7mm	+7mm	14mm	10mm
12mm	8mm	+7mm	15mm	
13mm	9mm	+8mm	17mm	
14mm	10mm	+8mm	18mm	
15mm	11mm	+8mm	19mm	
16mm	12mm	+8mm	20mm	

Vrednost adicije prema metodi refrakcije (npr. Add.2.25)	22F = Prednja adicija Add. 2.25
	22B = Zadnja adicija Add. 2.25
	22W= Foropter Add. 2.25

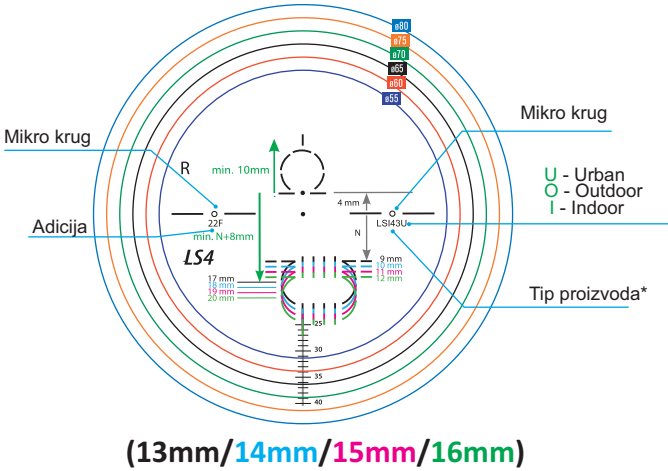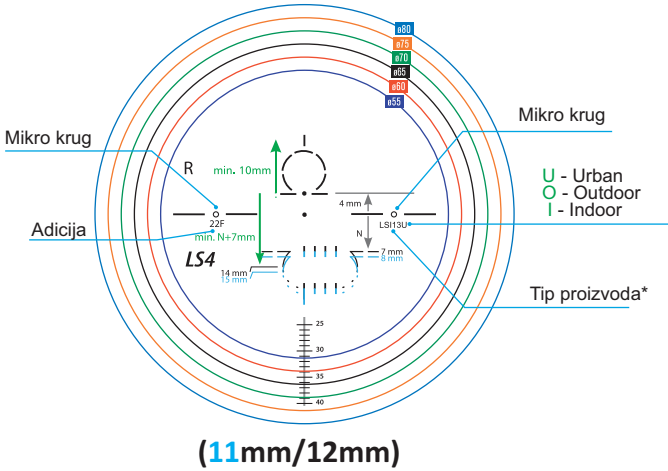

* LSI - oznaka dizajna, a sledeći broj pokazuje dubinu progresivnog kanala, a zadnji broj materijal (kod materijala 1.50 UV 400 imamo i broj i slovo 1L)

Hoyalux iD LifeStyle 4i & 4

PROGRESIV FREEFORM



iDLIFESTYLE

4


Gravure	Materijal - indeks					
	1.50 UV400	1.50	1.53	1.60	1.67	1.74
Hoyalux LifeStyle 4 Urban 11 mm	LS11LU	LS11U	LS1XU	LS13U	LS15U	LS17U
Hoyalux LifeStyle 4 Urban 12 mm	LS21LU	LS21U	LS2XU	LS23U	LS25U	LS27U
Hoyalux LifeStyle 4 Urban 13 mm	LS31LU	LS31U	LS3XU	LS33U	LS35U	LS37U
Hoyalux LifeStyle 4 Urban 14 mm	LS41LU	LS41U	LS4XU	LS43U	LS45U	LS47U
Hoyalux LifeStyle 4 Urban 15 mm	LS51LU	LS51U	LS5XU	LS53U	LS55U	LS57U
Hoyalux LifeStyle 4 Urban 16 mm	LS61LU	LS61U	LS6XU	LS63U	LS65U	LS67U
Hoyalux LifeStyle 4 Outdoor 11 mm	LS11LO	LS11O	LS1XO	LS13O	LS15O	LS17O
Hoyalux LifeStyle 4 Outdoor 12 mm	LS21LO	LS21O	LS2XO	LS23O	LS25O	LS27O
Hoyalux LifeStyle 4 Outdoor 13 mm	LS31LO	LS31O	LS3XO	LS33O	LS35O	LS37O
Hoyalux LifeStyle 4 Outdoor 14 mm	LS41LO	LS41O	LS4XO	LS43O	LS45O	LS47O
Hoyalux LifeStyle 4 Outdoor 15 mm	LS51LO	LS51O	LS5XO	LS53O	LS55O	LS57O
Hoyalux LifeStyle 4 Outdoor 16 mm	LS61LO	LS61O	LS6XO	LS63O	LS65O	LS67O
Hoyalux LifeStyle 4 Indoor 11 mm	LS11LI	LS11I	LS1XI	LS13I	LS15I	LS17I
Hoyalux LifeStyle 4 Indoor 12 mm	LS21LI	LS21I	LS2XI	LS23I	LS25I	LS27I
Hoyalux LifeStyle 4 Indoor 13 mm	LS31LI	LS31I	LS3XI	LS33I	LS35I	LS37I
Hoyalux LifeStyle 4 Indoor 14 mm	LS41LI	LS41I	LS4XI	LS43I	LS45I	LS47I
Hoyalux LifeStyle 4 Indoor 15 mm	LS51LI	LS51I	LS5XI	LS53I	LS55I	LS57I
Hoyalux LifeStyle 4 Indoor 16 mm	LS61LI	LS61I	LS6XI	LS63I	LS65I	LS47I

Minimalna visina ugradnje				
Dužina progresivnog kanala	N	+7mm ili +8mm	Od zenice do donje ivice okvira	Od zenice do gornje ivice okvira
11mm	7mm	+7mm	14mm	10mm
12mm	8mm	+7mm	15mm	
13mm	9mm	+8mm	17mm	
14mm	10mm	+8mm	18mm	
15mm	11mm	+8mm	19mm	
16mm	12mm	+8mm	20mm	

Vrednost adicije prema metodi refrakcije (npr. Add.2.25)	22F = Prednja adicija Add. 2.25
	22B = Zadnja adicija Add. 2.25
	22W= Foropter Add. 2.25

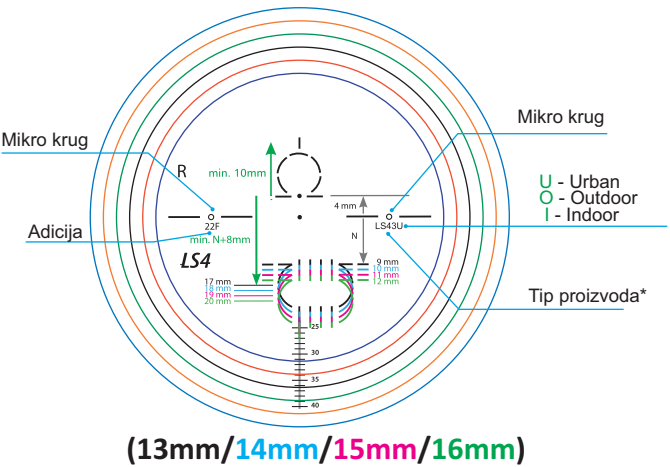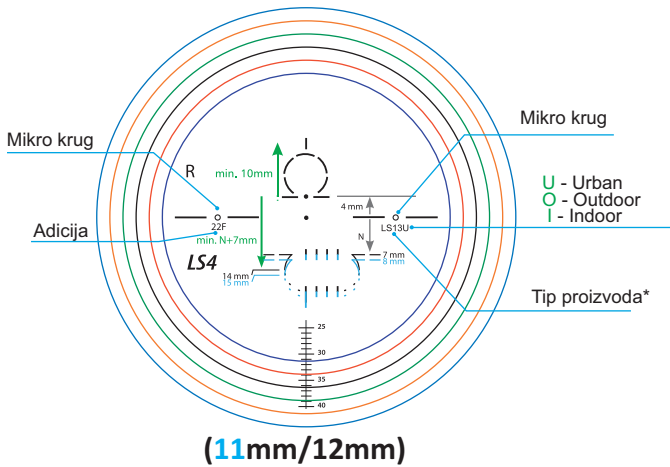

* LS - oznaka dizajna, a sledeći broj pokazuje dubinu progresivnog kanala, a zadnji broj materijal (kod materijala 1.50 UV 400 imamo i broj i slovo 1L)




Hoyalux iD LifeStyle 4i & 4

PROIZVODNI OPSEG

(belo, Sensity foto)

16-11mm

Eyvia 1.74
(samo bela)

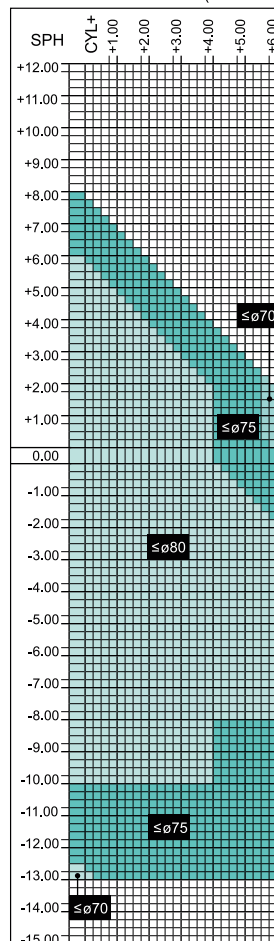


Proizvodni opsezi

Ø80: +6.00 □ -10.00 cyl.≤4.00
Ø80: +4.00 □ -8.00 cyl.≤6.00
Ø75: +8.00 □ -12.50 cyl.≤6.00
Ø70: +8.00 □ -13.00 cyl.≤6.00

Adicija: 0.75 - 3.50
Prizma do 5 cm/m

16-11mm

Eynea 1.67

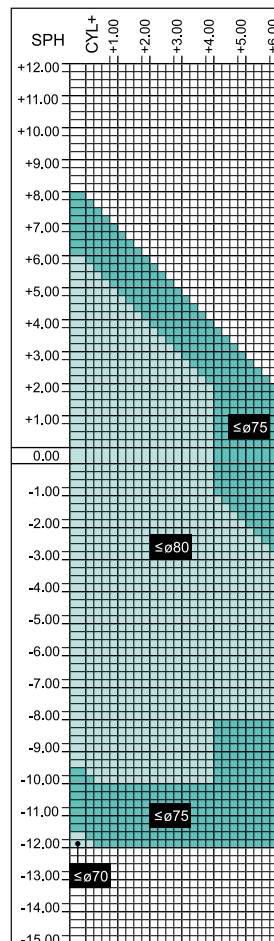


Proizvodni opsezi

Ø80: +6.00 □ -9.50 cyl.≤4.00
Ø80: +3.00 □ -8.00 cyl.≤6.00
Ø75: +8.00 □ -11.50 cyl.≤6.00
Ø70: +8.00 □ -12.00 cyl.≤6.00

Adicija: 0.75 - 3.50
Prizma do 5 cm/m

16-11mm

Eyas 2.0 1.60

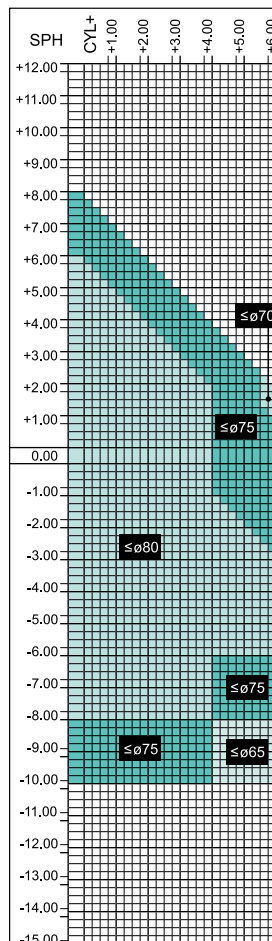


Proizvodni opsezi

Ø80: +6.00 □ -8.00 cyl.≤4.00
Ø80: +3.00 □ -6.00 cyl.≤6.00
Ø75: +8.00 □ -10.00 cyl.≤4.00
Ø75: +8.00 □ -8.00 cyl.≤6.00
Ø70: +8.00 □ -10.00 cyl.≤4.00
Ø70: +8.00 □ -8.00 cyl.≤6.00
Ø65: +8.00 □ -10.00 cyl.≤6.00

Adicija: 0.75 - 3.50
Prizma do 5 cm/m

16-11mm PNX 1.53 and 1.50

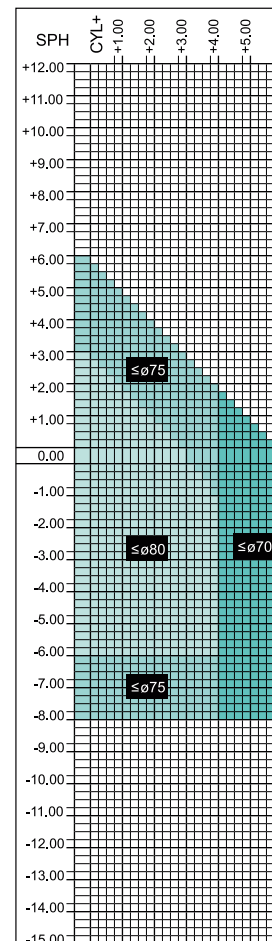


Proizvodni opsezi

Ø80: +3.00 □ -6.00 cyl.≤4.00
Ø75: +6.00 □ -8.00 cyl.≤4.00
Ø70: +6.00 □ -8.00 cyl.≤6.00

Adicija: 0.75 - 3.50
Prizma do 3 cm/m

Hoyalux iD LifeStyle 4i & 4 Polarized

PROIZVODNI OPSEG



(Polarizovano)

